


Spider Sprayer



The Spider over row linkage sprayer offers an extremely cost effective solution to small and medium sized operators with challenging or sloping terrain.

The turbine airstream delivery system achieves excellent penetration of the canopy, while the manually extendable and adjustable arms allow the operator to easily set up the machine so that the chemicals get exactly where needed.

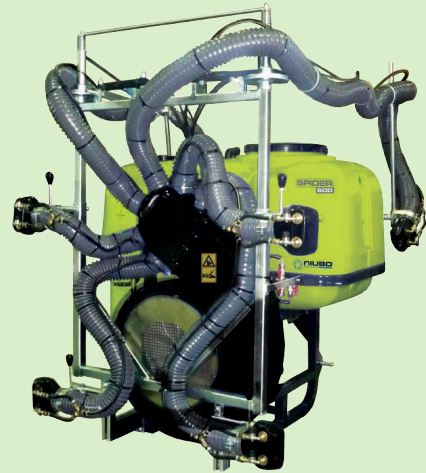





STANDARD FEATURES AND BENEFITS:

- Polyethylene main tank, system flushing and hand-washing tanks
- Bertolini PA530 pump, 52L/min @ 20 Bar
- Durable hot dip galvanised tank frame
- Independent left and right hydraulic arm fold (using tractor controls)
- Extendable and adjustable arms
- 8 double outlets with twin nozzles and anti-drip device
- 2 speed gearbox
- Reinforced PTO shaft
- Manual electronic control with in-cab switch box

OPTIONAL EQUIPMENT:

UG0019 Upgrade to BRAVO 180 Control Auto rate control

MODEL SPECIFICATIONS:

					A	B	C
Model	lt	n°	n°	kg	mm	mm	mm
USI3008	300	8	16	290	2000	1350	1600
USI4008	400	8	16	310	2000	1350	1600
USI6008	600	8	16	327	2000	1350	1600

